
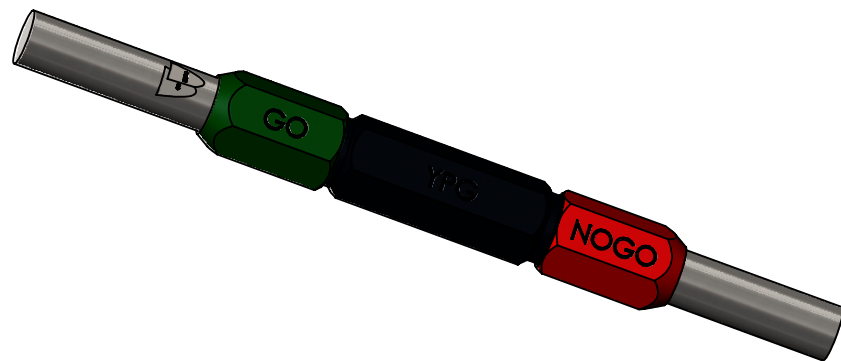


Pin diameter range 0.2 – 19.45mm				-standard	
A (GO diameter)	B (GO protrusion)	C (GO Depth)	D (NOGO Depth)	E (NOGO protrusion)	F (NOGO diameter)
	35mm			30mm	

Depth step standards

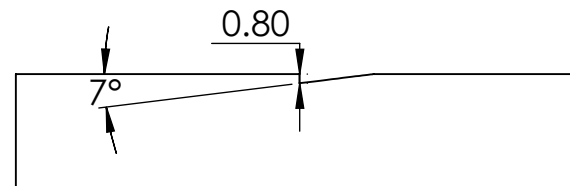

DIMENSIONS ARE IN MILLIMETERS		
NAME	DATE	
DRAWN D.Fletcher	23/04/2019	
TITLE: Whistle style depth step (GO-NOGO Same pin)		
MATERIAL: Tool Steel		

Yorkshire Precision Gauges
Hatfield
Doncaster
England
DN7 6QF



DWG. NO.
WSDS-002

t: +44 (0)1302 840 303
f: +44 (0)1302 843 570
Gauges@ypg.co.uk
<http://www.ypg.co.uk/>

SCALE: 1.25:1

SHEET 1 OF 1